


SETTING UP A HENRI STUDIO 2650F1 FOUNTAIN

- 1) Choose a location for your 2650F1 fountain such that the front can be seen and enjoyed while the back side is somewhat hidden but accessible for servicing needs.
- 2) Set up is simple. The Foam Diffuser has already been factory installed (glued) as is the Barbed Elbow in the back.
- 3) Set the Light in the front basin and feed the light cord through the hole between the front and back inside the basin, pulling it out the back.
- 4) Set the water Pump in the back of the basin – face down (intake side down) - allowing the cord to drape out the back.
- 5) Thread the Barbed Adapter into the pump top. Attach the tube to the Barbed Adapter and then to the Elbow above.
- 6) Fill the basin with water. Read your Pump instructions and your Light instructions. Connect the Light cord to the Transformer Provided. Then, plug both your Pump and the Light Transformer into a GFCI protected circuit. (Both pump and light can work on the same circuit, drawing less than one amp in total.)

Enjoy your new Henri Fountain.

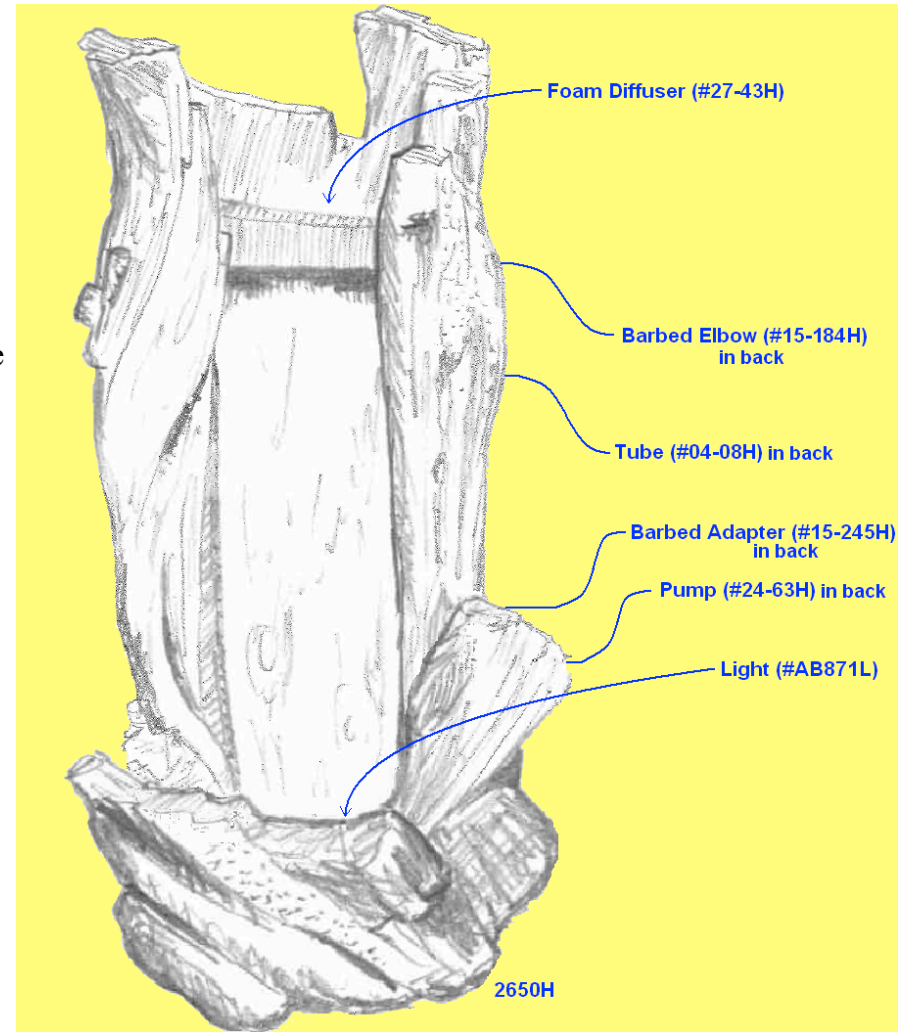

IMPORTANT – WINTER CARE

Winter ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- * Disconnect power to pumps and lights.
- * Remove plugs / stopper in all fountain bowls to open drains and let all moisture out. Keep drains open throughout winter.
- * Place an absorbant material like burlap, blankets, etc. inside vases/bowls and cover all with a Henri fountain cover.
- * Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use salt or chemical ice removers as these may damage concrete.

By following these simple and sensible precautions during the winter season, you will protect your fountain for years of beauty and enjoyment.